



DS9900 Series Corded Hybrid Imager For Retail



Accessories Guide

DS9900 Series – Boost productivity at the point of sale with the ultimate in performance and design



DS9908



DS9908R


Cable options

USB

Series A



Power Plus

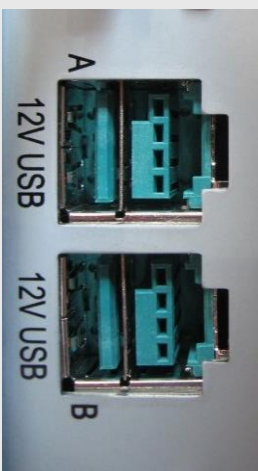

USB Cables

CBA-U21-S07ZBR

Shielded USB: Series A Connector, 7Ft.
(2.1M), Straight, BC1.2



OR

CBA-U23-S07ZBR

Shielded USB: Power Plus Connector, 7Ft.
(2.1M), Straight, 12V



The full list of supported cables for both DS9908 and DS9908R can be found at:

https://partnerportal.zebra.com/PartnerPortal/product_services/downloads/z/barcode_scanners/Universal-Cable-Guide-Bar-Code-Scanners.xlsx

Main features

- USB communication
- Automatically detects the host
- Powered from the host, including DS9908R
- Straight or coiled cables available, as well as various cable lengths
- Range of different host types cables available
- Compatible with DS9808 USB cables (Shielded USB Cables are recommended for best ESD performance)

Power Supplies

Not Applicable for USB Cables

Cable options

RS-232



RS-232 Cables

CBA-R01-S07PBR

RS232: DB9F, 7Ft. (2M) ST, TXD-2, W/ TTL Current Limit Protection [Requires external 5V power supply]



OR

CBA-R37-C09ZBR

RS232: DB9F, 9Ft. (2.8M) CL, PWR Pin 9, W/ TTL Current Limit Protection



OR

CBA-R08-S07ZBR

RS232: 7FT (2M), NIXDORF BEETLE- 5V Direct Power, W/ TTL Current Limit Protection



The full list of supported cables for both DS9908 and DS9908R can be found at:

https://partnerportal.zebra.com/PartnerPortal/product_services/downloads_z/barcode_scanners/Universal-Cable-Guide-Bar-Code-Scanners.xlsx

Main features

- Serial communication
- Automatically detects the host
- External power supply not required, unless specified
- Straight or coiled cables available, as well as various cable lengths
- Range of different host types cables available
- Compatible with DS9808 & DS9808R RS-232 Cables

Power Supplies for RS-232 cables

PWR- WUA5V4W0US	Power Supply, 5VDC, 100 - 240VAC, US/CAN/MX/JP/TW
PWR- WUA5V4W0BR	Power Supply, 5VDC, 100 - 240VAC, Brazil
PWR- WUA5V4W0EU	Power Supply, 5VDC, 100 - 240VAC, EU/UK
PWR- WUA5V4W0CN	Power Supply, 5VDC, 100 - 240VAC, CN
PWR- WUA5V4W0AU	Power Supply, 5VDC, 100 - 240VAC, HK/AU




+



PWR-WUA5V4W0US
Power Supply
5.2V, 1.1A

Cable options

IBM (RS-485)

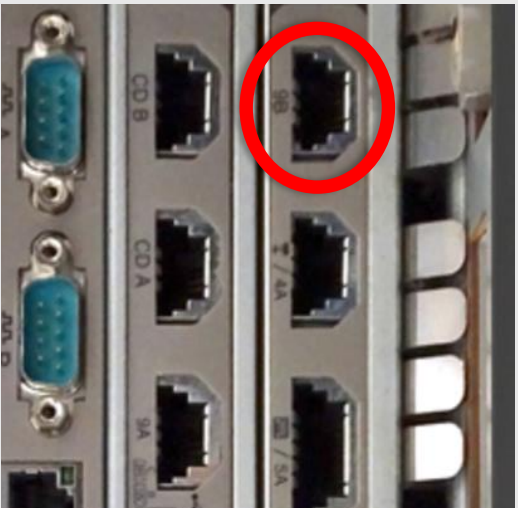

IBM Cables

CBA-M61-S07ZAR

Assembly, Cable, Auto-Host
detect – IBM: 468X/9X, 7FT(2M)
Straight, Port 9B



The full list of supported cables for both DS9908
and DS9908R can be found at:

[https://partnerportal.zebra.com/PartnerPortal/pro
duct_services/downloads_z/barcode_scanners/
Universal-Cable-Guide-Bar-Code-Scanners.xlsx](https://partnerportal.zebra.com/PartnerPortal/pro duct_services/downloads_z/barcode_scanners/ Universal-Cable-Guide-Bar-Code-Scanners.xlsx)

Main features

- IBM 4690 communication
- Automatically detects the host, but does not choose a port address
- External power supply not required

Power Supplies

Not Applicable for IBM Cables

Mounting Options

Multi-mount Bracket

BRKT-MM0099C-04

Multi-Mount, DS9908 (Midnight Black)

[Compatible with DS9908 only, will not fit the DS9908R]

